

GIOTTO CEILING

SPECIFICATION

Range: **GIOTTO**Design: **Sezgin Aksu**

"Snowsound Technology" sound-absorbing element, suspended from the ceiling with cables.

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.


The panel has Euroclass B-s2, d0 fire reaction.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained "Acoustic Absorption Class A", in accordance with UNI EN ISO 11654.



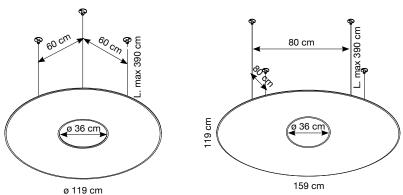

Fixing kit description:

The panel is equipped at the top with a hexagonal stiffening frame made of galvanized tubular steel with rectangular section 40x10mm. It is fixed directly to the panel using self-tapping screws. The chassis features cylindrical elements Ø10 mm that allow precise height adjustment of the cables by means of a pressure system with safety lock. They connect to two steel cables Ø1.5 mm and two circular chromed steel plates Ø40 mm equipped with two holes for anchoring screws to the ceiling.

The products described in this data sheet are **CE marked** according to the harmonized product standard EN 13964 for the intended use as a drop ceiling.



Available colors:



