SPECIFICATION

Range: **SNOWGEMS**

Design: Annalisa Dominoni, Benedetto Quaguaro

"Snowsound Technology" sound-absorbing free-standing element.

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panels are equipped with a through-hole for the insertion of the tubular frame and are each completed with chrome-plated zamak shaped ferrules. The 50x50 cm and 36x57.5 cm panels can rotate on their own axis.


The panel has Euroclass B-s2, d0 fire reaction.


The panel is Greenquard Gold certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is 100% recyclable and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained "Acoustic Absorption Class A", in accordance with UNI EN ISO 11654.







Structure description:


Structure composed of a ø 20 mm galvanised steel tubular, fitted with threaded bushes at the ends, and a 10 mm thick laser-cut painted steel base. The base has a central hole for attaching the tubular by means of an M8x25 screw. The upper part of the tubular is fitted with a chromium-plated zinc-plated closing washer screwed on by means of an M8x20 screw.







Available colors:

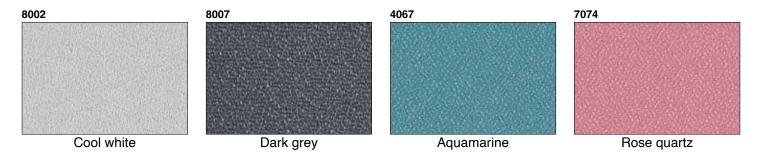



Caimi Brevetti S.p.A. reserves, by its unappealable judgment, the right to modify without prior notice the building materials, the technical and aesthetic specifications, as well as the dimensions of the products in this technical sheet, where pictures are purely as an indication.